


Anschlußplan für Türöffner mit RR-Kontakt und Freilaufdiode
Connection diagram lock release with monitoring and recovery diode
Raccordement gâche électrique avec contact et diode de roue libre



Maximale Kontaktbelastbarkeit: 25 V/ 1 A
 Maximum switching capacity of the contact: 25 V/ 1 A
 Capacité de charge maximum du contact: 25 V/ 1 A

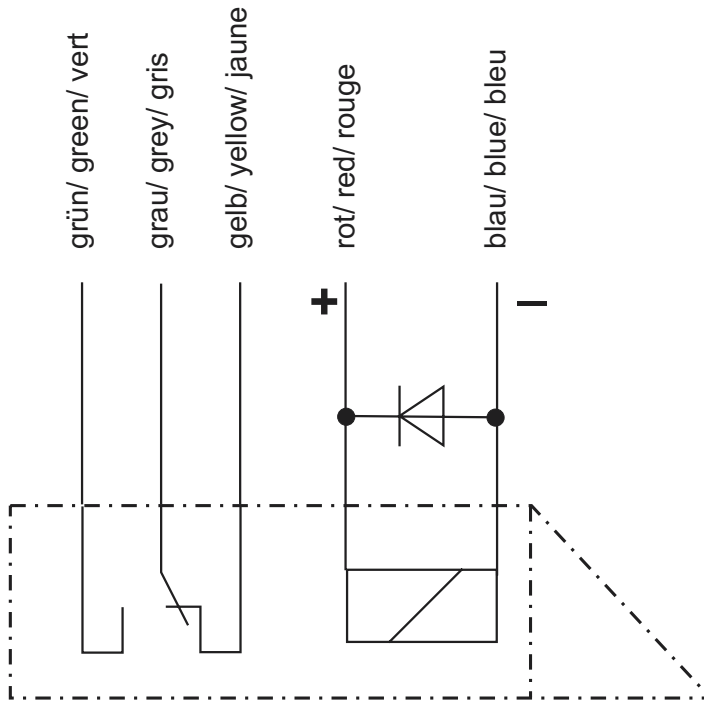

eff eff Fritz Fuss GmbH&Co
Kommanditgesellschaft auf Aktien
 Bildstockstr 20
 72458 Albstadt

Tel.: (0 74 31) 1 23-0
 Fax: (0 74 31) 1 23-2 40
 E-Mail: Infotoe@effeff.com
 Internet: www.effeff.com

An ASSA ABLOY Group company

ASSA ABLOY

D00007 02